

SCM 2CO ECO

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Product image



Similar to illustration

Relay sockets for the D-SERIES DRM relays

- 2 and 4 CO contacts
- Screw and PUSH IN connection
- Standard and low heights

General ordering data

Version	D-SERIES DRM, Relay socket, Number of contacts: 2, CO contact, Continuous current: 12 A, Screw connection
Order No.	7760056263
Type	SCM 2CO ECO
GTIN (EAN)	6944 169662966
Qty.	10 Stück

Erstellungs-Datum April 26, 2022 5:44:19 AM CEST

Katalogstand 08.04.2022 / Technische Änderungen vorbehalten

SCM 2CO ECO

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technische Daten

Dimensions and weights

Depth	61 mm	Depth (inches)	2.402 inch
Height	79.9 mm	Height (inches)	3.146 inch
Width	27.2 mm	Width (inches)	1.071 inch
Net weight	36.4 g		

Temperatures

Storage temperature	-40 °C...70 °C	Operating temperature	-40 °C...70 °C
Humidity	35...85 % rel. humidity, no condensation		

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Rated data UL

Certificate No. (cURus)	E312083
-------------------------	---------

Load side

Rated switching voltage	250 V AC	Continuous current	12 A
Max. switching voltage, AC	300 V	Contact type	2 CO contact

General data

Rail	TS 35		
Colour	black		
UL94 flammability rating component	Component	Retaining clip	
	UL94 flammability rating	HB	
	Component	Mounting foot	
	UL94 flammability rating	HB	
	Component	Housing	
	UL94 flammability rating	V-2	

Insulation coordination

Rated voltage	250 V	Pollution severity	2
Surge voltage category	III	Insulating material group	C
Clearance and creepage distances for control side - load side	≥ 5.5 mm	Dielectric strength for control side - load side	4 kV _{eff} / 1 min
Dielectric strength of neighbouring contacts	4 kV _{eff} / 1 min	Dielectric strength of open contact	1 kV _{eff} / 1 min
Impulse withstand voltage	4.8 kV (1.2/50 µs)	Protection degree	IP20

Further details of approvals / standards

Standards	EN 60664-1:2007, EN 61000-6-2:2005, EN 61000-6-4:2007 + A1:2011, UL 508	Certificate No. (cURus)	E312083
-----------	--	-------------------------	---------

SCM 2CO ECO

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technische Daten

Connection data

Wire connection method	Screw connection	Stripping length, rated connection	7 mm
Tightening torque, min.	0.5 Nm	Tightening torque, max.	0.8 Nm
Clamping range, min.	0.5 mm ²	Clamping range, max.	2.5 mm ²
Wire cross-section, solid, min.	0.5 mm ²	Wire cross-section, solid, max.	2.5 mm ²
Wire connection cross section, finely stranded, min.	0.5 mm ²	Wire connection cross section, finely stranded, max.	2.5 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	0.5 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.	2.5 mm ²
Conductor cross-section, flexible, AEH (DIN 46228-1), min.	0.5 mm ²	Conductor cross-section, flexible, AEH (DIN 46228-1), max.	2.5 mm ²
Wire connection cross section, finely stranded, two clampable wires, min.	0.5 mm ²	Wire cross-section, finely stranded, two clampable wires, max.	1.5 mm ²
Blade size	size PH1		

Classifications

ETIM 6.0	EC001456	ETIM 7.0	EC001456
ETIM 8.0	EC001456	ECLASS 9.0	27-37-16-03
ECLASS 9.1	27-37-16-03	ECLASS 10.0	27-37-16-03
ECLASS 11.0	27-37-16-03		

Approvals

Approvals



ROHS	Conform
UL File Number Search	E312083

Downloads

Approval/Certificate/Document of Conformity	EU Konformitätserklärung / EU Declaration of Conformity
Engineering Data	CAD data – STEP
Engineering Data	EPLAN, WSCAD
Catalogues	Catalogues in PDF-format
Brochures	


SCM 2CO ECO

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany


www.weidmueller.com

Zeichnungen


Wiring diagram

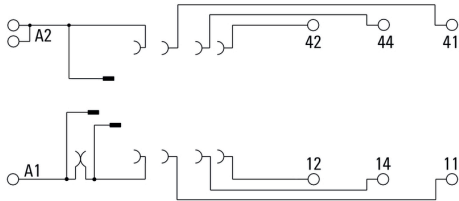

Graph

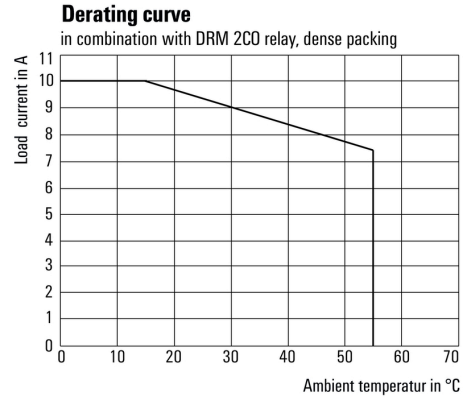

Dimensional drawing

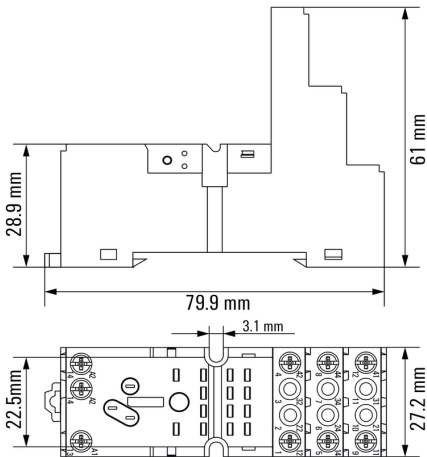

Example of use

Derating curve
 in combination with DRM 2CO relay, dense packing

How to install marker
 on screw connection sockets (four slots available)

Push the marker into a provided slot

Marker:
 for example ESG 9/26 SCM ECO MC NE WS
 Part-No. 1520980000

Socket:
 for example SCM 4CO ECO
 Part-No. 7760056264

How to install marker
 on screw connection sockets (four slots available)

SCM 2CO ECO

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Mating connector (fully pluggable)

with LED



Relay from the D-SERIES DRE.

- 2 or 4 CO contacts
- Compact design
- Wide range of coil voltages
- Integrated with test button (AC red, DC blue)
- Integrated with status display (AC red, DC green) and/or free-wheel diode

General ordering data

Type	DRE270024L	Version
Order No.	7760054273	D-SERIES DRE, Relay, Number of contacts: 2, CO contact, Ag alloy,
GTIN (EAN)	6944169719813	Rated control voltage: 24 V DC, Continuous current: 5 A, Plug-in
Qty.	20 Stück	connection
Type	DRE270730L	Version
Order No.	7760054279	D-SERIES DRE, Relay, Number of contacts: 2, CO contact, Ag alloy,
GTIN (EAN)	6944169719875	Rated control voltage: 230 V AC, Continuous current: 5 A, Plug-in
Qty.	20 Stück	connection
Type	DRE270524L	Version
Order No.	7760054276	D-SERIES DRE, Relay, Number of contacts: 2, CO contact, Ag alloy,
GTIN (EAN)	6944169719844	Rated control voltage: 24 V AC, Continuous current: 5 A, Plug-in
Qty.	20 Stück	connection
Type	DRE270110L	Version
Order No.	7760054275	D-SERIES DRE, Relay, Number of contacts: 2, CO contact, Ag alloy,
GTIN (EAN)	6944169719837	Rated control voltage: 110 V DC, Continuous current: 5 A, Plug-in
Qty.	20 Stück	connection
Type	DRE270012L	Version
Order No.	7760054272	D-SERIES DRE, Relay, Number of contacts: 2, CO contact, Ag alloy,
GTIN (EAN)	6944169719806	Rated control voltage: 12 V DC, Continuous current: 5 A, Plug-in
Qty.	20 Stück	connection
Type	DRE270048L	Version
Order No.	7760054274	D-SERIES DRE, Relay, Number of contacts: 2, CO contact, Ag alloy,
GTIN (EAN)	6944169719820	Rated control voltage: 48 V DC, Continuous current: 5 A, Plug-in
Qty.	20 Stück	connection
Type	DRE270548L	Version
Order No.	7760054277	D-SERIES DRE, Relay, Number of contacts: 2, CO contact, Ag alloy,
GTIN (EAN)	6944169719851	Rated control voltage: 48 V AC, Continuous current: 5 A, Plug-in
Qty.	20 Stück	connection
Type	DRE270615L	Version
Order No.	7760054278	D-SERIES DRE, Relay, Number of contacts: 2, CO contact, Ag alloy,
GTIN (EAN)	6944169719868	Rated control voltage: 115 V AC, Continuous current: 5 A, Plug-in
Qty.	20 Stück	connection

SCM 2CO ECO

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Mating connector (fully pluggable)

standard relay



Individual relays within the D-SERIES DRM

- 2 CO contacts
- Optional AC or DC coils

General ordering data

Type	DRM270048	Version
Order No.	7760056052	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash
GTIN (EAN)	4032248856039	gold-plated, Rated control voltage: 48 V DC, Continuous current: 10 A,
Qty.	20 Stück	Plug-in connection
Type	DRM270012	Version
Order No.	7760056050	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash
GTIN (EAN)	4032248856053	gold-plated, Rated control voltage: 12 V DC, Continuous current: 10 A,
Qty.	20 Stück	Plug-in connection
Type	DRM270548	Version
Order No.	7760056056	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash
GTIN (EAN)	4032248855995	gold-plated, Rated control voltage: 48 V AC, Continuous current: 10 A,
Qty.	20 Stück	Plug-in connection
Type	DRM270524	Version
Order No.	7760056055	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash
GTIN (EAN)	4032248856008	gold-plated, Rated control voltage: 24 V AC, Continuous current: 10 A,
Qty.	20 Stück	Plug-in connection
Type	DRM270615	Version
Order No.	7760056057	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash
GTIN (EAN)	4032248855988	gold-plated, Rated control voltage: 115 V AC, Continuous current: 10
Qty.	20 Stück	A, Plug-in connection
Type	DRM270110	Version
Order No.	7760056053	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash
GTIN (EAN)	4032248856022	gold-plated, Rated control voltage: 110 V DC, Continuous current: 10
Qty.	20 Stück	A, Plug-in connection
Type	DRM270024	Version
Order No.	7760056051	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash
GTIN (EAN)	4032248856046	gold-plated, Rated control voltage: 24 V DC, Continuous current: 10 A,
Qty.	20 Stück	Plug-in connection
Type	DRM270220	Version
Order No.	7760056054	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash
GTIN (EAN)	4032248856015	gold-plated, Rated control voltage: 220 V DC, Continuous current: 10
Qty.	20 Stück	A, Plug-in connection
Type	DRM270730	Version
Order No.	7760056058	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash
GTIN (EAN)	4032248855971	gold-plated, Rated control voltage: 230 V AC, Continuous current: 10
Qty.	20 Stück	A, Plug-in connection

SCM 2CO ECO

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Mating connector (fully pluggable)

with LED and free-wheel diode



Individual relays within the D-SERIES DRM

- 2 CO contacts
- DC coils
- With integrated status LED and free-wheeling diode

General ordering data

Type	DRM270024LD	Version
Order No.	7760056124	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash gold-plated, Rated control voltage: 24 V DC, Continuous current: 10 A, Plug-in connection
GTIN (EAN)	4032248855544	
Qty.	20 Stück	
Type	DRM270024LD	Version
Order No.	7760056077	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash gold-plated, Rated control voltage: 24 V DC, Continuous current: 10 A, Plug-in connection
GTIN (EAN)	4032248855780	
Qty.	20 Stück	

with LED



Individual relays within the D-SERIES DRM

- 2 CO contacts
- AC coils
- With integrated status LED

General ordering data

Type	DRM270024L AU	Version
Order No.	7760056183	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi gold-plated, Rated control voltage: 24 V DC, Continuous current: 10 A, Plug-in connection
GTIN (EAN)	4032248922222	
Qty.	20 Stück	
Type	DRM270730L AU	Version
Order No.	7760056184	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi gold-plated, Rated control voltage: 230 V AC, Continuous current: 10 A, Plug-in connection
GTIN (EAN)	4032248922239	
Qty.	20 Stück	

SCM 2CO ECO

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Mating connector (fully pluggable)

with LED and test button



- Individual relays within the D-SERIES DRM
- 2 CO contacts
 - AC coils
 - With integrated status LED and test button

General ordering data

Type	DRM270548LT	Version
Order No.	7760056074	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash
GTIN (EAN)	4032248855810	gold-plated, Rated control voltage: 48 V AC, Continuous current: 10 A,
Qty.	20 Stück	Plug-in connection
Type	DRM270012LT	Version
Order No.	7760056068	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash
GTIN (EAN)	4032248855872	gold-plated, Rated control voltage: 12 V DC, Continuous current: 10 A,
Qty.	20 Stück	Plug-in connection
Type	DRM270220LT	Version
Order No.	7760056072	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash
GTIN (EAN)	4032248855834	gold-plated, Rated control voltage: 220 V DC, Continuous current: 10
Qty.	20 Stück	A, Plug-in connection
Type	DRM270524LT	Version
Order No.	7760056073	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash
GTIN (EAN)	4032248855827	gold-plated, Rated control voltage: 24 V AC, Continuous current: 10 A,
Qty.	20 Stück	Plug-in connection
Type	DRM270024LT	Version
Order No.	7760056069	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash
GTIN (EAN)	4032248855865	gold-plated, Rated control voltage: 24 V DC, Continuous current: 10 A,
Qty.	20 Stück	Plug-in connection
Type	DRM270048LT	Version
Order No.	7760056070	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash
GTIN (EAN)	4032248855858	gold-plated, Rated control voltage: 48 V DC, Continuous current: 10 A,
Qty.	20 Stück	Plug-in connection
Type	DRM270110LT	Version
Order No.	7760056071	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash
GTIN (EAN)	4032248855841	gold-plated, Rated control voltage: 110 V DC, Continuous current: 10
Qty.	20 Stück	A, Plug-in connection
Type	DRM270615LT	Version
Order No.	7760056075	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash
GTIN (EAN)	4032248855803	gold-plated, Rated control voltage: 115 V AC, Continuous current: 10
Qty.	20 Stück	A, Plug-in connection
Type	DRM270730LT	Version
Order No.	7760056076	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash
GTIN (EAN)	4032248855797	gold-plated, Rated control voltage: 230 V AC, Continuous current: 10
Qty.	20 Stück	A, Plug-in connection

SCM 2CO ECO

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Mating connector (fully pluggable)

with LED



Individual relays within the D-SERIES DRM

- 2 CO contacts
- AC coils
- With integrated status LED

General ordering data

Type	DRM270524L	Version
Order No.	7760056064	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash
GTIN (EAN)	4032248855919	gold-plated, Rated control voltage: 24 V AC, Continuous current: 10 A,
Qty.	20 Stück	Plug-in connection
Type	DRM270024L	Version
Order No.	7760056060	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash
GTIN (EAN)	4032248855957	gold-plated, Rated control voltage: 24 V DC, Continuous current: 10 A,
Qty.	20 Stück	Plug-in connection
Type	DRM270012L	Version
Order No.	7760056059	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash
GTIN (EAN)	4032248855964	gold-plated, Rated control voltage: 12 V DC, Continuous current: 10 A,
Qty.	20 Stück	Plug-in connection
Type	DRM270110L	Version
Order No.	7760056062	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash
GTIN (EAN)	4032248855933	gold-plated, Rated control voltage: 110 V DC, Continuous current: 10
Qty.	20 Stück	A, Plug-in connection
Type	DRM270048L	Version
Order No.	7760056061	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash
GTIN (EAN)	4032248855940	gold-plated, Rated control voltage: 48 V DC, Continuous current: 10 A,
Qty.	20 Stück	Plug-in connection
Type	DRM270220L	Version
Order No.	7760056063	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash
GTIN (EAN)	4032248855926	gold-plated, Rated control voltage: 220 V DC, Continuous current: 10
Qty.	20 Stück	A, Plug-in connection
Type	DRM270615L	Version
Order No.	7760056066	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash
GTIN (EAN)	4032248855896	gold-plated, Rated control voltage: 115 V AC, Continuous current: 10
Qty.	20 Stück	A, Plug-in connection
Type	DRM270730L	Version
Order No.	7760056067	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash
GTIN (EAN)	4032248855889	gold-plated, Rated control voltage: 230 V AC, Continuous current: 10
Qty.	20 Stück	A, Plug-in connection
Type	DRM270548L	Version
Order No.	7760056065	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash
GTIN (EAN)	4032248855902	gold-plated, Rated control voltage: 48 V AC, Continuous current: 10 A,
Qty.	20 Stück	Plug-in connection

SCM 2CO ECO

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Mating connector (fully pluggable)

with LED and test button



- Individual relays within the D-SERIES DRM
- 2 CO contacts
 - AC coils
 - With integrated status LED and test button

General ordering data

Type	DRM270024LT AU	Version
Order No.	7760056185	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi gold-plated, Rated control voltage: 24 V DC, Continuous current: 10 A, Plug-in connection
GTIN (EAN)	4032248922246	
Qty.	20 Stück	
Type	DRM270730LT AU	Version
Order No.	7760056186	D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi gold-plated, Rated control voltage: 230 V AC, Continuous current: 10 A, Plug-in connection
GTIN (EAN)	4032248922253	
Qty.	20 Stück	

with LED and free-wheel diode



- Relay from the D-SERIES DRE.
- 2 or 4 CO contacts
 - Compact design
 - Wide range of coil voltages
 - Integrated with test button (AC red, DC blue)
 - Integrated with status display (AC red, DC green) and/or free-wheel diode

General ordering data

Type	DRE270024LD	Version
Order No.	7760054280	D-SERIES DRE, Relay, Number of contacts: 2, CO contact, Ag alloy, Rated control voltage: 24 V DC, Continuous current: 5 A, Plug-in connection
GTIN (EAN)	6944169719882	
Qty.	20 Stück	

SCM 2CO ECO

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Accessories

Retaining clips



Retaining clip for D-SERIES DRM relays
 • Metal and plastic retaining clip

General ordering data

Type	SCM CLIP P	Version
Order No.	7760056367	D-SERIES DRM, Retaining clip
GTIN (EAN)	6944169773334	
Qty.	5 Stück	
Type	DRM/DRL CLIP M	Version
Order No.	7760056108	D-SERIES, Retaining clip
GTIN (EAN)	4032248855568	
Qty.	10 Stück	

Custom printing



ESG is the tried-and-tested marker in MultiCard format for use on many well-known electrical devices. The result is high-quality device marking with a high-contrast appearance.

Various types are available for devices from manufacturers like Siemens, ABB, Beckhoff etc.

Advantages at a glance:

- Tags for universal usage, self-adhesive or clip-on tags, depending on type
- For aligned equipment, e.g. circuit breakers, we supply ESG markers for clipping onto tag rails
- Individual laser-quality printing according to specifications

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

Type	ESG 9/26 SCM ECO MC SDR	Version
Order No.	1525800000	ESG, Device markers x 26 mm, PA 66, Colour: To customer specification
GTIN (EAN)	4050118331875	
Qty.	80 Stück	

SCM 2CO ECO

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Accessories

Cross-connection for socket with screw connection

Cross-connection for the sockets in the D-SERIES DRM.



General ordering data

Type	SCM-I QV S	Version
Order No.	1132080000	RIDERSERIES RCM, Cross-connector
GTIN (EAN)	4032248912193	
Qty.	10 Stück	

Crosshead screwdriver Phillips

Crosshead screwdriver, Phillips, SDK PH DIN 5262, ISO 8764/2-PH, output to ISO 8764-PH, ChromTop tip, SoftFinish grip



General ordering data

Type	SDK PH1 X 80	Version
Order No.	2749410000	Screwdriver, Blade length: 80 mm
GTIN (EAN)	4050118895636	
Qty.	1 Stück	

SCM 2CO ECO

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Accessories

LED



Pluggable protective modules for the D-SERIES relay sockets, with optional protective functions.

- With green LED

General ordering data

Type	RIM 3 24/60VUC	Version
Order No.	7760056018	D-SERIES, LED module, Rated control voltage: 24...60 V UC, Plug-in connection
GTIN (EAN)	4032248878130	
Qty.	10 Stück	
Type	RIM 3 6/24VUC	Version
Order No.	7940018457	D-SERIES, LED module, Rated control voltage: 6...24 V UC, Plug-in connection
GTIN (EAN)	4032248878192	
Qty.	20 Stück	
Type	RIM 3 110/230VUC	Version
Order No.	7940018455	D-SERIES, LED module, Rated control voltage: 110...230 V UC, Plug-in connection
GTIN (EAN)	4032248878185	
Qty.	20 Stück	

LED / free-wheel diode



Pluggable protective modules for the D-SERIES relay sockets, with optional protective functions.

- With green LED and free-wheeling diode

General ordering data

Type	RIM 2 24/60VDC	Version
Order No.	7760056016	D-SERIES, LED module with freewheel diode, Rated control voltage: 24...60 V DC, Plug-in connection
GTIN (EAN)	4032248878123	
Qty.	10 Stück	
Type	RIM 2 6/24VDC	Version
Order No.	7760056015	D-SERIES, LED module with freewheel diode, Rated control voltage: 6...24 V DC, Plug-in connection
GTIN (EAN)	4032248878116	
Qty.	10 Stück	
Type	RIM 2 110/230VDC	Version
Order No.	7760056017	D-SERIES, LED module with freewheel diode, Rated control voltage: 110...230 V DC, Plug-in connection
GTIN (EAN)	4032248896615	
Qty.	10 Stück	

SCM 2CO ECO

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Accessories

Crosshead screwdriver, Phillips



VDE insulated screwdriver sets, for working on live parts up to 1000 V AC and 1500 V DC, DIN EN 60900. IEC 900. Each piece is "GS" safety tested. Blade made from fully hardened, high-alloy chromium-vanadium-molybdenum steel, gun-metal finish.

General ordering data

Type	SDIK SLIM PH1 X 80	Version
Order No.	2749650000	Mounting tool, Blade length: 80 mm
GTIN (EAN)	4050118896398	
Qty.	1 Stück	

Protection modules



Pluggable protective modules for the D-SERIES relay sockets, with optional protective functions.

- With free-wheeling diode or RC filter

General ordering data

Type	RIM 3 110/230VAC LED	Version
Order No.	7760056045	D-SERIES, RC filter, Rated control voltage: 110...230 V AC, Plug-in connection
GTIN (EAN)	4032248878147	
Qty.	10 Stück	
Type	RIM 1 6/230VDC	Version
Order No.	7760056169	D-SERIES, Free-wheeling diode, Rated control voltage: 6...230 V, Plug-in connection
GTIN (EAN)	4032248967728	
Qty.	10 Stück	
Type	RIM 3 110/230VAC	Version
Order No.	7760056014	D-SERIES, RC filter, Rated control voltage: 110...230 V AC, Plug-in connection
GTIN (EAN)	4032248878109	
Qty.	10 Stück	

SCM 2CO ECO

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Accessories

Blank



ESG is the tried-and-tested marker in MultiCard format for use on many well-known electrical devices. The result is high-quality device marking with a high-contrast appearance.

Various types are available for devices from manufacturers like Siemens, ABB, Beckhoff etc. Advantages at a glance:

- Tags for universal usage, self-adhesive or clip-on tags, depending on type
- For aligned equipment, e.g. circuit breakers, we supply ESG markers for clipping onto tag rails
- Individual laser-quality printing according to specifications

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

Type	ESG 9/26 SCM ECO MC NE ...	Version
Order No.	1521000000	ESG, Device markers x 26 mm, PA 66, Colour: grey
GTIN (EAN)	4050118327878	
Qty.	80 Stück	
Type	ESG 9/26 SCM ECO MC NE ...	Version
Order No.	1520980000	ESG, Device markers x 26 mm, PA 66, Colour: white
GTIN (EAN)	4050118327939	
Qty.	80 Stück	
Type	ESG 9/26 SCM ECO MC NE ...	Version
Order No.	1520990000	ESG, Device markers x 26 mm, PA 66, Colour: yellow
GTIN (EAN)	4050118327861	
Qty.	80 Stück	

Crosshead screwdriver Phillips



VDE insulated crosshead screwdriver, for Phillips screws, SDIK PH DIN 7438, ISO 8764/2-PH, output to ISO 8764-PH, SoftFinish grip

General ordering data

Type	SDIK PH1 X 80	Version
Order No.	2749890000	Screwdriver, Blade length: 80 mm
GTIN (EAN)	4050118897098	
Qty.	1 Stück	